

THG 2000

**High-strength special steel
with good machining properties for demanding applications**

COLD WORK

PLASTIC MOULDING

HOT WORK

HIGH PERFORMANCE STEEL



This information is based on our present state of knowledge and is intended to provide general notes on our products and their uses.
It should not therefore be construed as a warranty of specific properties of the products described or a warranty for fitness for a particular purpose.

General

THG 2000 is a chromium-molybdenum-vanadium-alloy steel developed for such applications as indexable insert drill and milling cutter bodies. THG 2000 is available in soft annealed and prehardened condition.

Its main features are:

- Good resistance to abrasion at both low and high temperatures
- Good toughness and ductility
- Good high-temperature strength and resistance to thermal fatigue
- Good through-hardening characteristics and suitability for air hardening
- Very little distortion during hardening.

Compared with a normal tool steel, the machinability is improved, which facilitates such operations as drilling and tapping small holes. It is particularly suitable for induction-hardening, and can also be given a PVD coating without reducing the hardness of the tool.

Typical analysis %	C 0,39	Si 1,0	Mn 0,4	Cr 5,3	Mo 1,3	V 0,9
Delivery condition	Soft annealed to approx. 185 HB Prehardened 39–43 HRC					
Colour code	Yellow/violet – soft annealed Violet/grey – prehardened					

Applications

THG 2000 is a high-strength special steel, intended for applications with severe demands on the mechanical properties of the material, while also requiring good machinability.

Examples of applications are:

- Indexable insert drills and milling cutters
- Milling chucks and tool tapers
- Highly stressed drive shafts and transmission parts for motor vehicles
- Rolls in continuous casting machines
- Clamp jaws
- Conveyor rollers for carrying hot parts.



Indexable insert drills, manufactured from THG 2000.

Properties

PHYSICAL DATA

Hardened and tempered to 45 HRC.

Data at room temperature and at elevated temperatures.

Temperature	20°C (68°F)	400°C (750°F)	600°C (1110°F)
Density kg/m ³ lbs/in ³	7800 0,281	7700 0,277	7600 0,274
Modulus of elasticity N/mm ² psi	210 000 30,3 x 10 ⁶	180 000 26,1 x 10 ⁶	140 000 20,3 x 10 ⁶
Coefficient of thermal expansion per °C from 20°C per °F from 68°F	— —	12,6 x 10 ⁻⁶ 7,0 x 10 ⁻⁶	13,2 x 10 ⁻⁶ 7,3 x 10 ⁻⁶
Coefficient of thermal conductivity W/m °C Btu in/(ft ² h°F)	— —	29 204	30 211


MECHANICAL PROPERTIES

Approximate tensile strength at room temperature.

Hardness	52 HRC	45 HRC
Ultimate tensile strength, Rm N/mm ² kp/mm ²	1820 185	1420 145
tsi psi	117 263 000	92 206 000
Yield strength, Rp0,2 N/mm ² kp/mm ²	1520 155	1280 130
tsi psi	98 220 000	83 185 000


Effect of hardening time on hardness at elevated temperatures

Hardness, HRC

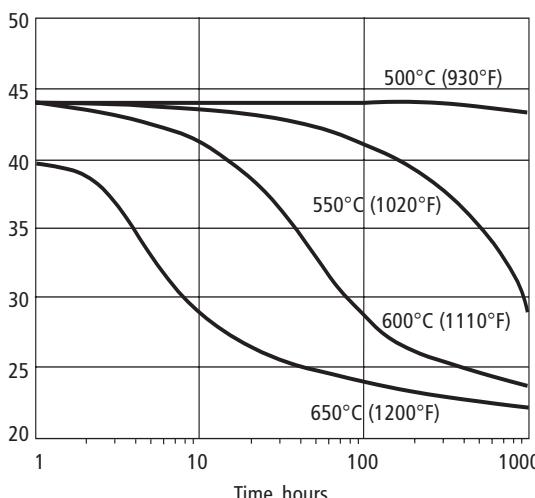

Strength at elevated temperatures

Longitudinal direction.

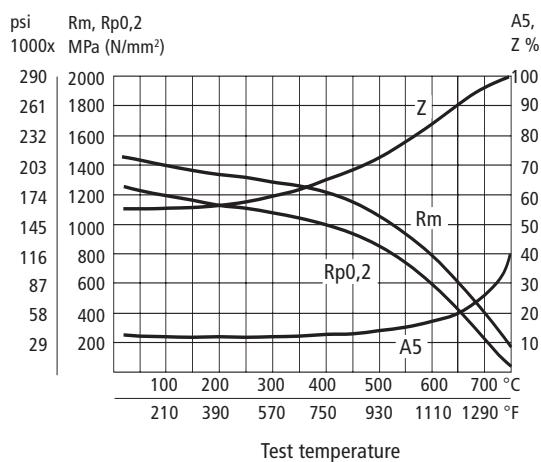**HARDENING**

Preheating temperature: 600–850°C (1110–1560°F).

Austenitizing temperature: 900–1030°C (1650–1890°F), normally 1020°C (1870°F).

Temperature °C	Temperature °F	Soaking time* minutes	Hardness before tempering
900	1650	45	44 ±3 HRC
920	1690	45	46 ±3 HRC
940	1720	45	47 ±3 HRC
960	1760	45	48 ±3 HRC
980	1800	45	50 ±3 HRC
1000	1830	45	52 ±3 HRC
1020	1870	30	53 ±3 HRC

* Soaking time = time at specified temperature after the part is fully heated through.


Protect the part from decarburization during hardening.

Heat treatment**SOFT ANNEALING**

Protect the steel against decarburization and heat it through to 850°C (1560°F). Allow it to cool in the furnace at a rate of 10°C per hour to 650°C (1200°F), and then freely in air.

STRESS RELIEVING

After rough machining it is recommended to do a stress relieving, the part shall then be heated through to 650°C (1200°F), and held at this temperature for two hours. Cool slowly to 500°C (930°F), and then freely in air.

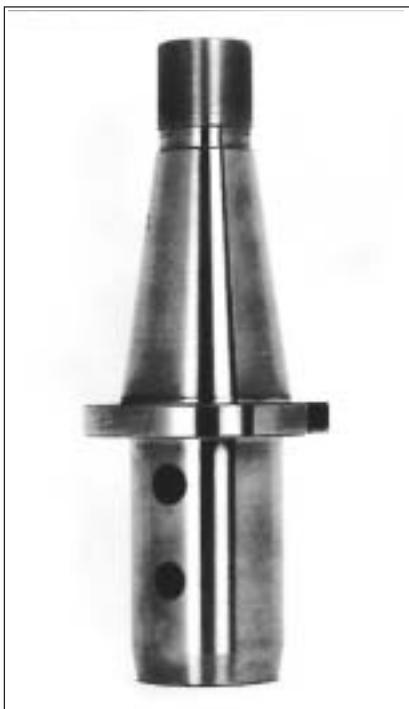

A tool holder for an end mill made of THG 2000.


QUENCHING MEDIA

- Circulating air or atmosphere
- Vacuum furnace (with sufficient positive pressure)
- Martempering bath or fluidized bed at 180–220°C (350–430°F), or at 450–550°C (840–1020°F), followed by cooling in air
- Hot oil 60–70°C (140–160°F).

Note: Temper the part as soon as its temperature has fallen to 50–70°C (120–160°F).

TEMPERING

Choose the tempering temperature to suit the hardness required by reference to the diagram below. Temper twice, with intermediate cooling to room temperature. The minimum tempering temperature is 180°C (360°F). The holding time at the relevant temperature shall be at least 2 hours.

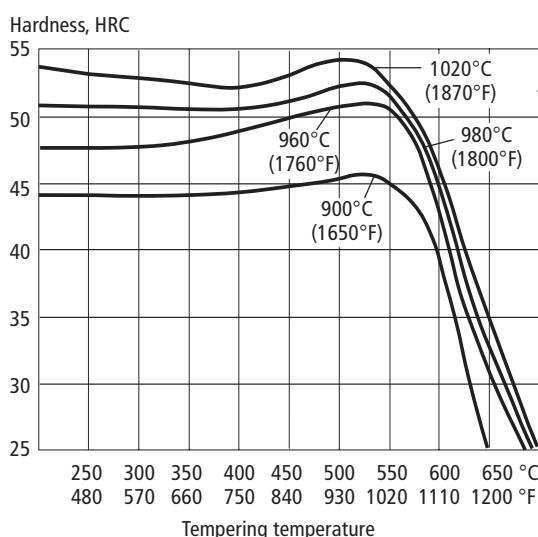Tempering graph

Tempering within the range 425–525°C (800–980°F) is not normally recommended, due to the fact that toughness properties are degraded in this temperature range.


DIMENSIONAL CHANGES DURING HARDENING

Test plate size 100 x 100 x 25 mm

		Width %	Length %	Thickness %
Oil-hardened from 1020°C (1868°F)	min. max.	-0,08 -0,15	-0,06 -0,16	0,00 +0,30
Air-hardened from 1020°C (1868°F)	min. max.	-0,02 +0,03	-0,05 +0,02	- +0,05
Vacuum-hardened from 1020°C (1868°F)	min. max.	+0,01 +0,02	-0,02 -0,04	+0,08 +0,12

DIMENSIONAL CHANGES DURING TEMPERING

Dimensional changes %

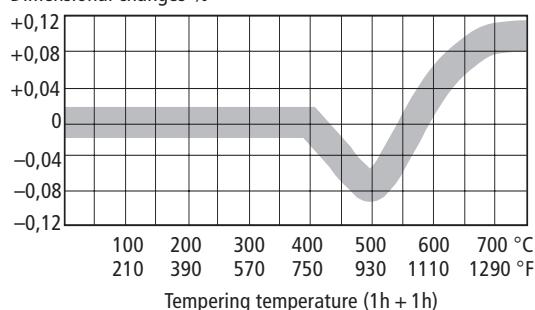

Note: The dimensional changes occurring during hardening and tempering are cumulative.

CASE HARDENING

Case hardening increases the surface hardness and wear resistance of the steel, increases its resistance to bending and twisting and improves the fatigue strength.

THG 2000 can be case hardened as follows:

Carburization temperature: 900°C (1650°F)

Austenitizing temperature: 980°C (1795°F)

Cooling: in air or oil

Tempering: 250°C (480°F) twice, or 525°C

(980°F) twice.

Surface hardness: 58 ±3 HRC.

Carburizing time	Case hardening depth approx.	
	mm	inch
2 hours	~0,35	~0,014
4 hours	~0,65	~0,025
16 hours	~1,30	~0,051

Use a mild carburization material.

NITRIDING

Nitriding produces a hard surface layer which is very resistant to wear and erosion. However, the nitrided layer is brittle and can crack or spall if exposed to mechanical or thermal shock, with the risk increasing with layer thickness. Before nitriding, the part must be hardened and tempered at a temperature at least 50°C (90°F) above the nitriding temperature.

Nitriding in ammonia at 510°C (950°F), or plasma nitriding at 480°C (896°F) in a 25% nitrogen—75% hydrogen mixture, can both produce a surface hardness of about 1100 HV_{0,2}. In general, plasma nitriding is to be preferred, as it provides better control of the nitrogen potential. In particular, it avoids formation of the "white layer", although gas nitriding can give perfectly acceptable results.

THG 2000 can also be nitro-carburized in gas or salt baths, to produce a surface hardness of 900–1000 HV_{0,2}.

NITRIDING DEPTH

Process	Time hours	Nitriding depth	
		mm	inch
Gas nitriding at 510°C (950°F)	10	0,12	0,005
	30	0,20	0,008
Plasma nitriding at 480°C (896°F)	10	0,12	0,005
	30	0,18	0,007
Nitrocarburizing – in gas at 580°C (1076°F)	2,5	0,11	0,004
– in salt bath at 580°C (1076°F)	1	0,06	0,002

Nitriding to case depths more than 0,3 mm (0,012 inch) is not recommended for components intended for high-temperature applications. THG 2000 can also be nitrided in the soft-annealed condition, although its hardness and case depth will be somewhat reduced.



THG 2000 is a suitable material for various types of milling cutter bodies.

Cutting data recommendations

The cutting data below for THG 2000 should be regarded as guide values, which should be modified in the light of experience to suit specific local conditions. For more detailed information, see Uddeholm brochure "Cutting data recommendations".

Soft annealed condition: ~185 HB

TURNING

Cutting data parameters	Turning with carbide		Turning with high speed steel	
	Rough turning	Fine turning	Fine turning	Fine turning
Cutting speed (v_c) m/min f.p.m.	210–260 690–860	260–310 860–1020	30–35 100–115	
Feed (f) mm/r i.p.r	0,2–0,4 0,008–0,016	0,05–0,2 0,002–0,008	0,05–0,3 0,002–0,012	
Depth of cut (a_p) mm inch	2–4 0,08–0,16	0,5–2 0,02–0,08	0,5–3 0,02–0,12	
Tool grade	P10–P15 Coated carbide	P10 Coated carbide or cermet	–	

DRILLING

High speed steel twist drill

Drill diameter Ø mm inch	Cutting speed (v_c) m/min f.p.m.	Feed (f)	
		mm/r	i.p.r.
–5	–3/16	25–30*	82–100*
5–10	3/16–3/8	25–30*	82–100*
10–15	3/8–5/8	25–30*	82–100*
15–20	5/8–3/4	25–30*	82–100*
		0,08–0,20	0,003–0,008
		0,20–0,30	0,008–0,012
		0,30–0,35	0,012–0,014
		0,35–0,40	0,014–0,016

*For coated HSS drill $v_c = 35$ m/min. (115 f.p.m.).

Carbide drill

Cutting data parameters	Type of drill		
	Indexable insert	Solid carbide	Brazed carbide ¹⁾
Cutting speed, (v_c) m/min f.p.m.	220–240 725–790	130–160 430–530	80–110 265–360
Feed (f) mm/r i.p.r.	0,06–0,15 ²⁾ 0,002–0,006	0,08–0,30 ²⁾ 0,003–0,012	0,15–0,25 ²⁾ 0,006–0,01

¹⁾ Drill with internal cooling channels and brazed carbide tip.

²⁾ Depending on drill diameter.

MILLING

Face and square shoulder milling

Cutting data parameter	Milling with carbide	
	Rough milling	Fine milling
Cutting speed (v_c) m/min f.p.m.	200–260 660–860	260–300 860–990
Feed (f_z) mm/tooth inch/tooth	0,2–0,4 0,008–0,016	0,1–0,2 0,004–0,008
Depth of cut (a_p) mm inch	2–5 0,08–0,2	–2 –0,08
Tool grade	P20–P40 Coated carbide	P10–P20 Coated carbide or cermet

End milling

Cutting data parameters	Type of end mill		
	Solid carbide	Carbide indexable insert	High speed steel
Cutting speed, (v_c) m/min f.p.m.	150–200 495–660	160–210 530–690	40–45 ¹⁾ 130–148
Feed (f_z) mm/tooth inch/tooth	0,03–0,20 ²⁾ 0,0012–0,008	0,08–0,20 ²⁾ 0,003–0,008	0,05–0,35 ²⁾ 0,002–0,014
Tool grade	"Micrograin" Coated carbide	P20–P30 Coated carbide	–

¹⁾ For coated HSS end mill $v_c = 50$ –60 m/min. (165–200 f.p.m.)

²⁾ Depending on radial depth of cut and cutter diameter.



**Cutting data recommendations for
THG 2000 in prehardened condition
39–43 HRC**

TURNING

Cutting data parameters	Turning with carbide	
	Rough turning	Fine turning
Cutting speed (v_c) m/min f.p.m.	60–80 200–260	80–100 260–330
Feed (f) mm/r i.p.r	0,2–0,4 0,008–0,016	0,05–0,2 0,002–0,008
Depth of cut (a_p) mm inch	2–4 0,08–0,16	0,5–2 0,02–0,08
Tool grade	P10–P15 Coated carbide	P10 Coated carbide or cermet or mixed carbide

DRILLING

TiCN-coated high speed steel drill

Drill diameter \varnothing mm inch	Cutting speed (v_c) m/min f.p.m.	Feed (f)	
		mm/r	i.p.r.
–5	–3/16	10–15	33–50
5–10	3/16–3/8	10–15	33–50
10–15	3/8–5/8	10–15	33–50
15–20	5/8–3/4	10–15	33–50
			0,03–0,15 0,15–0,20 0,20–0,25 0,25–0,30
			0,001–0,006 0,006–0,008 0,008–0,01 0,01–0,012



A transmission part manufactured from THG 2000,
hardened to 45 HRC.

Carbide drill

Cutting data parameters	Type of drill		
	Indexable insert	Solid carbide	Brazed carbide ¹⁾
Cutting speed, (v_c) m/min f.p.m.	90–110 300–360	80–100 260–330	50–60 165–200
Feed (f) mm/r i.p.r	0,05–0,10 ²⁾ 0,002–0,004	0,05–0,15 ²⁾ 0,002–0,006	0,10–0,15 ²⁾ 0,004–0,006

¹⁾ Drill with internal cooling channels and brazed carbide tip.

²⁾ Depending on drill diameter.

MILLING

Face and square shoulder milling

Cutting data parameter	Milling with carbide	
	Rough milling	Fine milling
Cutting speed (v_c) m/min f.p.m.	40–50 130–165	50–70 165–230
Feed (f_z) mm/tooth inch/tooth	0,15–0,25 0,006–0,01	0,10–0,20 0,004–0,008
Depth of cut (a_p) mm inch	2–4 0,08–0,16	–2 –0,08
Tool grade	P20–P40 Uncoated carbide	P10–P20 Coated carbide or cermet

End milling

Cutting data parameters	Type of end mill		
	Solid carbide	Carbide indexable insert	High speed steel
Cutting speed, (v_c) m/min f.p.m.	80–100 260–330	80–100 260–330	8–10 26–33
Feed (f_z) mm/tooth inch/tooth	0,03–0,15 ¹⁾ 0,0012–0,006	0,08–0,15 ¹⁾ 0,003–0,006	0,05–0,20 ¹⁾ 0,002–0,008
Tool grade	"Micrograin" Coated carbide	P15–P30 Coated carbide	TiCN-coated HSS mill

¹⁾ Depending on radial depth of cut and cutter diameter.

GRINDING

A general grinding wheel recommendations is given below. More information can be found in the Uddeholm brochure "Grinding of Tool Steel".

Wheel recommendation

Type of grinding	Soft annealed condition	Hardened condition
Face grinding straight wheel	A 46 HV	A 46 GV
Face grinding segments	A 24 GV	A 36 GV
Cylindrical grinding	A 46 LV	A 60 JV
Internal grinding	A 46 JV	A 60 IV
Profile grinding	A 100 LV	A 120 JV

Electrical-discharge machining, EDM

If spark-erosion is performed in the hardened and tempered condition, the white re-cast layer should be removed mechanically e.g. by grinding or stoning. The tool should then be given an additional temper at approx. 25°C (50°F) below the previous tempering temperature.

Hard-chromium plating

After plating, parts should be tempered at 180°C (360°F) for 4 hours to avoid the risk of hydrogen embrittlement.

Welding

Welding of THG 2000 can be performed with good results if proper precautions are taken regarding elevated temperature, joint preparation, choice of consumables and welding procedure.

Welding method	TIG	MMA
Working temperature	325–375°C 620–710°F	325–375°C 620–710°F
Filler metal	QRO 90 TIG-WELD	QRO 90 WELD
Hardness after welding	48–51 HRC	48–51 HRC
Heat treatment after welding		
Hardened condition	Temper at 20°C (40°F) below the original tempering temperature.	
Soft annealed condition	Soft-anneal the material at 850°C (1560°F) in protected atmosphere. Then cool in the furnace at 10°C (20°F) per hour to 650°C (1200°F) then freely in air.	

More detailed information can be found in the Uddeholm brochure "Welding of Tool Steel".

Further information

Please, contact your local Uddeholm office for further information on the selection, heat treatment, application and availability of Uddeholm tool steels.



The combination of good high-temperature strength, wear resistance and good machining properties make THG 2000 suitable for use as rolls in continuous casting machines.



This information is based on our present state of knowledge and is intended to provide general notes on our products and their uses. It should not therefore be construed as a warranty of specific properties of the products described or a warranty for fitness for a particular purpose.

UDDEHOLM EUROPE

AUSTRIA

UDDEHOLM
Hansaallee 321
D-40549 Düsseldorf
Telephone: +49 211 535 10
Telefax: +49 211 535 12 80

BELGIUM

UDDEHOLM N.V.
Waterstraat 4
B-9160 Lokeren
Telephone: +32 9 349 11 00
Telefax: +32 9 349 11 11

CROATIA

BOHLER UDDEHOLM Zagreb
d.o.o za trgovinu
Zitnjak b.b
10000 Zagreb
Telephone: +385 1 2459 301
Telefax: +385 1 2406 790

CZECHIA

BOHLER UDDEHOLM CZ s.r.o.
Division Uddeholm
U silnice 949
161 00 Praha 6 Ruzyně
Czech Republic
Telephone: +420 233 029 850,8
Telefax: +420 233 029 859

DENMARK

UDDEHOLM A/S
Kokmose 8, Bramdrupdam
DK-6000 Kolding
Telephone: +45 75 51 70 66
Telefax: +45 75 51 70 44

ESTONIA

UDDEHOLM TOOLING AB
Siliktäid 7
EE-0012 Tallinn
Telephone: +372 655 9180
Telefax: +372 655 9181

FINLAND

OY UDDEHOLM AB
Ritakuja 1, PL 57,
FIN-01741 VANTAA
Telephone: +358 9 290 490
Telefax: +358 9 2904 9249

FRANCE

UDDEHOLM S.A.
12 Rue Mercier, Z.I. de Mitry-Compans
F-77297 Mitry Mory Cedex
Telephone: +33 (0)1 60 93 80 10
Telefax: +33 (0)1 60 93 80 01

Branch office

UDDEHOLM S.A.
77bis, rue de Vesoul
La Nef aux Métiers
F-25000 Besançon
Telephone: +33 381 53 12 19
Telefax: +33 381 53 13 20

GERMANY

UDDEHOLM
Hansaallee 321
D-40549 Düsseldorf
Telephone: +49 211 535 10
Telefax: +49 211 535 12 80

Branch offices

UDDEHOLM
Falkenstraße 21
D-65812 Bad Soden/TS.
Telephone: +49 6196 659 60
Telefax: +49 6196 659 625

UDDEHOLM

Albstraße 10
D-73765 Neuhausen
Telephone: +49 715 898 65-0
Telefax: +49 715 898 65-25

GREAT BRITAIN, IRELAND

UDDEHOLM UK LIMITED
European Business Park
Taylors Lane, Oldbury
West Midlands B69 2BN
Telephone: +44 121 552 55 11
Telefax: +44 121 544 29 11
Dublin Telephone: +353 1 45 14 01

GREECE

UDDEHOLM STEEL TRADING
COMPANY
20, Athinon Street
G-Piraeus 18540
Telephone: +30 2 10 41 72 109/41 29 820
Telefax: +30 2 10 41 72 767

SKLERO S.A.

Steel Trading Comp. and
Hardening Shop
Frixou 11/Nikif. Ouranou
G-54627 Thessaloniki
Telephone: +30 31 51 46 77
Telefax +30 31 54 12 50

HUNGARY

UDDEHOLM TOOLING/BOK
Dunaharaszt, Jedlik Ányos út 25
H-2331 Dunaharaszt 1.Pf. 110
Telephone/Telefax: +36 24 492 690

ITALY

UDDEHOLM Italia S.p.A.
Via Palizzi, 90
I-20157 Milano
Telephone: +39 02 35 79 41
Telefax: +39 02 390 024 82

LATVIA

UDDEHOLM TOOLING AB
Deglava street 50
LV-1035 Riga
Telephone: +371 7 701 983, -981, -982
Telefax: +371 7 701 984

LITHUANIA

UDDEHOLM TOOLING AB
BE PLIENAS IR METALAI
T. Masiulio 18b
LT-3014 Kaunas
Telephone: +370 37 370613, -669
Telefax: +370 37 370300

THE NETHERLANDS

UDDEHOLM B.V.
Isolatorweg 30
NL-1014 AS Amsterdam
Telephone: +31 20 581 71 11
Telefax: +31 20 684 86 13

NORWAY

UDDEHOLM A/S
Jernkroken 18
Postboks 85, Kalbakken
N-0902 Oslo
Telephone: +47 22 91 80 00
Telefax: +47 22 91 80 01

POLAND

INTER STAL CENTRUM
Sp. z o.o./Co. Ltd.
ul. Kolejowa 291, Dziekanów Polski
PL-05-092 Lomianki
Telephone: +48 22 429 2260
Telefax: +48 22 429 2266

PORTUGAL

F RAMADA Aços e Industrias S.A.
P.O. Box 10
P-3881 Ovar Codex
Telephone: +351 56 58 61 11
Telefax: +351 56 58 60 24

ROMANIA

BÖHLER Romania SRL
Uddeholm Branch
Str. Atomistilor Nr 14A
077125 Magurele Jud Ifov
Telephone: +40 214 575007
Telefax: +40 214 574212

RUSSIA

UDDEHOLM TOOLING CIS
25 A Bolshoy pr PS
197198 St. Petersburg
Telephone: +7 812 233 9683
Telefax: +7 812 232 4679

SLOVAKIA

UDDEHOLM Slovakia
Nástrojové oceľe, s.r.o.
KRÁCINY 2
036 01 Martin
Telephone: +421 842 4 300 823
Telefax: +421 842 4 224 028

SLOVENIA

UDDEHOLM Italia S.p.A.
Via Palizzi, 90
I-20157 Milano
Telephone: +39 02 35 79 41
Telefax: +39 02 390 024 82

SPAIN

UDDEHOLM
Guifrà 690-692
E-08918 Badalona, Barcelona
Telephone: +34 93 460 1227
Telefax: +34 93 460 0558

Branch office

UDDEHOLM
Barrio San Martin de Arteaga, 132
Pol.Ind. Torrelarragoiti
E-48170 Zamudio
(Bizkaia)
Telephone: +34 94 452 13 03
Telefax: +34 94 452 13 58

SWEDEN

UDDEHOLM TOOLING
SVENSKA AB
Aminogatan 25
SE-431 53 Mölndal
Telephone: +46 31 67 98 50
Telefax: +46 31 27 02 94

SWITZERLAND

HERTSCH & CIE AG
General Wille Strasse 19
CH-8027 Zürich
Telephone: +41 1 208 16 66
Telefax: +41 1 201 46 15

UDDEHOLM NORTH AMERICA

USA

UDDEHOLM
4902 Tollview Drive
Rolling Meadows IL 60008
Telephone: +1 847 577 22 20
Telefax: +1 847 577 80 28

UDDEHOLM

548 Clayton Ct.,
Wood Dale IL 60191
Telephone: +1 630 350 10 00
Telefax: +1 630 350 08 80

UDDEHOLM

9331 Santa Fe Springs Road
Santa Fe Springs, CA 90670
Telephone: +1 562 946 65 03
Telefax: +1 562 946 77 21

UDDEHOLM

220 Cherry Street
Shrewsbury, MA 01545
Telephone: +1 508 845 1066
Telefax: +1 508 845 3471

CANADA

UDDEHOLM LIMITED
2595 Meadowvale Blvd.
Mississauga, Ontario L5N 7Y3
Telephone: +1 905 812 9440
Telefax: +1 905 812 8659

MEXICO

ACEROS BOHLER UDDEHOLM,
S.A. de C.V.
Calle 8 No 2, Letra "C"
Fraccionamiento Industrial Alce Blanco
C.P. 52787 Naucalpan de Juarez
Estado de Mexico
Telephone: +52 55 9172 0242
Telefax: +52 55 5576 6837

UDDEHOLM

Lerdo de Tejada No.542
Colonia Las Villas
66420 San Nicolas de Los Garza, N.L.
Telephone: +52 8-352 5239
Telefax: +52 8-352 5356

UDDEHOLM SOUTH AMERICA

ARGENTINA

UDDEHOLM S.A.
Mozart 40
1619-Centro Industrial Garin
Garin-Prov. Buenos Aires
Telephone: +54 332 744 4440
Telefax: +54 332 745 3222

BRAZIL

UDDEHOLM ACOS ESPECIAIS Ltda.
Estrada Yae Massumoto, 353
CEP 09842-160
Sao Bernardo do Campo - SP Brazil
Telephone: +55 11 4393 4560, -4554
Telefax: +55 11 4393 4561

UDDEHOLM SOUTH AFRICA

UDDEHOLM Africa (Pty) Ltd.
P.O. Box 539
ZA-1600 Isando/Johannesburg
Telephone: +27 11-974 2781
Telefax: +27 11-392 2486

UDDEHOLM AUSTRALIA

BOHLER-UDDEHOLM Australia
129-135 McCredie Road
Guildford NSW 2161
Private Bag 14
Telephone: +61 2 9681 3100
Telefax: +61 2 9632 6161

Branch offices

Sydney, Melbourne, Adelaide,
Brisbane, Perth, Newcastle,
Launceston, Albury, Townsville

ASSAB

ASSAB INTERNATIONAL

Skytteholmsvägen 2
P O Box 42
SE-171 11 Solna
Sweden
Telephone: +46 8 564 616 70
Telefax: +46 8 25 02 37

Subsidiaries

India, Iran, Turkey, United Arab
Emirates

Distributors in

Africa, Latin America, Middle East

ASSAB PACIFIC

ASSAB Pacific Pte. Ltd
171, Chin Swee Road
No. 07-02, San Centre
Singapore 169877
Telephone: +65 534 56 00
Telefax: +65 534 06 55

Subsidiaries

China, Hong Kong, Indonesia, Japan,
Korea, Malaysia, Philippine Islands,
Singapore, Taiwan, Thailand

When the first idea pops into your head, throughout the development process to the release of the new product, we'll be your partner. As the world's leading supplier of tooling materials and related services, we can be trusted. Meet us under the Uddeholm and ASSAB brands, wherever in the world you have your business.